


Ouverture de passage		Encombrement châssis (B x H1) cm	Dimensions caisson (C x H1) cm	Section interne		Dimensions de la porte		Epaisseur de la porte max. conseillé	
A cm	H cm			S cm		Lp cm	Hp cm	Sp cm	
				(100mm)	(125mm)			(100mm)	(125mm)
60	203	133 x 212	66,3 x 212	5,5	7,0	63	204	4,0	5,5
70	203	153 x 212	76,3 x 212	5,5	7,0	73	204	4,0	5,5
80	203	173 x 212	86,3 x 212	5,5	7,0	83	204	4,0	5,5
90	203	194 x 212	96,3 x 212	5,5	7,0	93	204	4,0	5,5
100	203	214 x 212	106,3 x 212	5,5	7,0	103	204	4,0	5,5
110	203	234 x 212	116,3 x 212	5,5	7,0	113	204	4,0	5,5
120	203	254 x 212	126,3 x 212	5,5	7,0	123	204	4,0	5,5



plaques de plâtre vantail double 100 - 125 mm

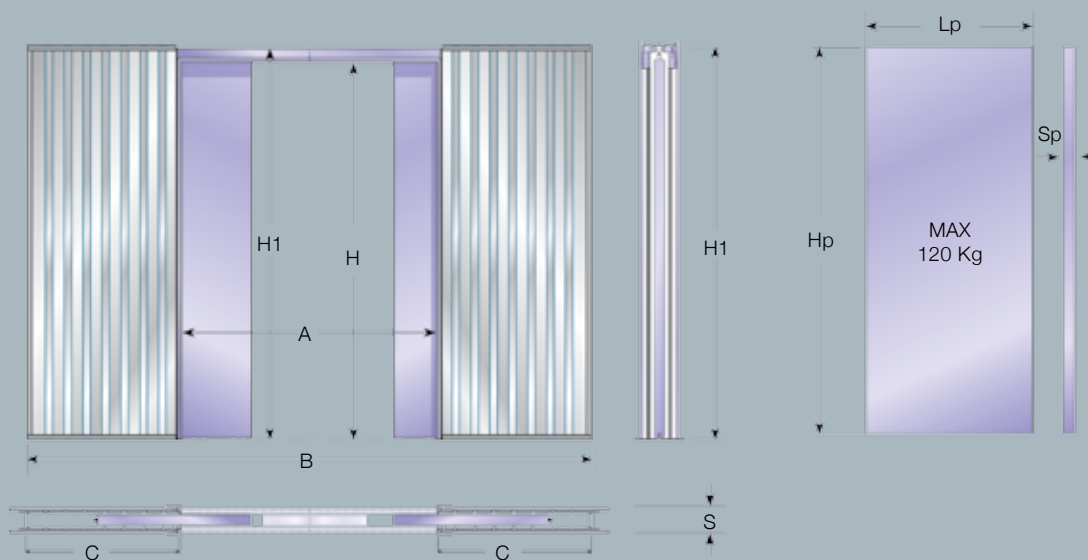

Ouverture de passage		Encombrement châssis (B x H1) cm	Dimensions caisson (C x H1) cm	Section interne		Dimensions de la porte		Epaisseur de la porte max. conseillé	
A cm	H cm			S cm		Lp cm	Hp cm	Sp cm	
				(100mm)	(125mm)			(100mm)	(125mm)
120	203	257 x 212	66,3 x 212	5,5	7,0	63	204	4,0	5,5
140	203	297 x 212	76,3 x 212	5,5	7,0	73	204	4,0	5,5
160	203	337 x 212	86,3 x 212	5,5	7,0	83	204	4,0	5,5
180	203	378 x 212	96,3 x 212	5,5	7,0	93	204	4,0	5,5
200	203	418 x 212	106,3 x 212	5,5	7,0	103	204	4,0	5,5
220	203	458 x 212	116,3 x 212	5,5	7,0	113	204	4,0	5,5
240	203	499 x 212	126,3 x 212	5,5	7,0	123	204	4,0	5,5

